



# FAST-BACK®

## POWERED BRUSHLESS MOTOR



### FAST-BACK® (FBK)

All-in-one fully digital DRIVE+MOTOR. The decentralized structure gives you much more freedom in designing your machine's layout. Installation, commissioning and service are much simpler. Many advantages such as cables and control cabinet space reduction. Motion controller and EMC line filter suppression are integrated.



#### STANDARD FEATURES

- ✓ Power supply 230 Vac three phase
- ✓ EMC line filter and in-rush circuit integrated
- ✓ Power supply for control circuits obtained from DC Bus
- ✓ Integrated regenerative circuit and power resistor
- ✓ Optical insulation between power stage and signals
- ✓ Integrated positioning control
- ✓ Feedback from encoder 2048 P/rev
- ✓ CAN BUS - CAN V2.0B standard (⚡ Optocoupled)
- ✓ CAN OPEN protocol implementations:
  - part of the DS301-V4.02
  - part of the DSP402-V2.0
- ✓ Fully programmable via RS232 (opto-isolated), Mod Bus-RTU based
- ✓ **Speeder-One**® software interface (Windows 98/2000/XP based)
- ✓ Multidrop interface RS232 to CAN BUS

#### OPTIONS

- ✓ Power supply 230 VAC single phase<sup>2</sup>
- ✓ Holding brake (internally controlled)
- ✓ Protection class: IP65, IP65S (with shaft sealing)
- ✓ Special flange and shafts available upon request
- ✓ Special windings
- ✓ 2 digital inputs (opto-isolated) 24 Vdc - 7 mA (PLC compatible)
- ✓ 1 digital output (opto-isolated) 24 Vdc - 50 mA (PLC compatible)
- ✓ 1 analog output programmable ±10 Vdc - 10 mA
- ✓ RS485 interface, Mod Bus - RTU based (⚡ Optocoupled) 230 Kbps max
- ✓ Safety Enable Function

#### SPECIFICATIONS

- ✓ Operating frequency 10 KHz
- ✓ Ambient temperature
  - operating at rated data: 0 ÷ 45°C (no derating)
  - rated and peak current derating: 45 ÷ 55°C (2.5%/°C)
  - maximum operating: 55°C max
  - storage: -20 ÷ 55°C
- ✓ Altitude A.M.S.L.
  - operating at rated data: 1000 m
  - rated and peak current derating: 1000 ÷ 2500 m (1.5 %/100m)
- ✓ Storage duration 1 year max\*
- ✓ Protection class IP54

\*: After 1 year storage duration the internal electrolytic power capacitors must be re-formed. Contact Axor's technical department for details.

#### TYPICAL APPLICATIONS

- food processing
- labelling equipment
- adjustment of formats
- medical equipment
- laser/water jet cutters
- pick-and-place equipment
- industrial printing
- limit stop adj. for wood, metal working machines
- size adj. for packing machines


SERIES		FBK 75				FBK 100		
SIZE		XS	S	M	L	S	M	L
<b>Mo</b> stall Torque ( $\Delta t=100^\circ\text{C}$ )	(Nm)	1.1	1.6	2.7	3.8	3.2	5.2	7.5
<b>Mpk</b> Peak Stall Torque (x 2 sec.)	(Nm)	3.3	4.8	8.1	10	10.3	10.5	15
<b>Nn</b> Rated speed <sup>1)</sup>	(Rpm)	3000	3000	3000	3000	3000	3000	2200
<b>Mn</b> Rated torque at Nn ( $\Delta t=100^\circ\text{C}$ )	(Nm)	0.95	1.35	2.35	3.3	2.8	4.5	6.4
<b>Power Supply</b> (grounded systems only)		230 VAC $\pm 10\%$ three phase (single-ph as optional feature) <sup>2)</sup>						
<b>Logic Supply</b> (for back-up only)		24 Vdc ( $\pm 10\%$ ) - 200mA						
<b>Logic Supply</b> (for back-up+brake)		24 Vdc ( $\pm 5\%$ ) - 800 mA MAX						
<b>J</b> Rotor Inertia	(Kg m <sup>2</sup> ) · 10 <sup>-4</sup>	0.4	0.6	1	1.4	1.8	2.8	3.8
<b>Jb</b> Brake Inertia	(Kg m <sup>2</sup> ) · 10 <sup>-4</sup>	0.122				0.37		
<b>BRAKE</b> stall torque ( $\Delta t=100^\circ\text{C}$ ) (24 Vdc +6% -10%)		4 Nm (0.5 Adc)				8 Nm (0.8 Adc)		
<b>MODULE</b>		2	3	5	7	3	5	7

NOTE <sup>1)</sup>: Rated speed refers at 230 VAC power supply three phase


<sup>2)</sup>: Single phase does not allow you to obtain the rated performance (torque and speed). Contact Axor's technical department for details.

## MECHANICAL DIMENSIONS






X2 X1 X3



SHAFT AND KEY



X2 X1 X3

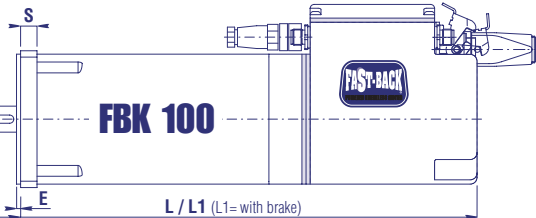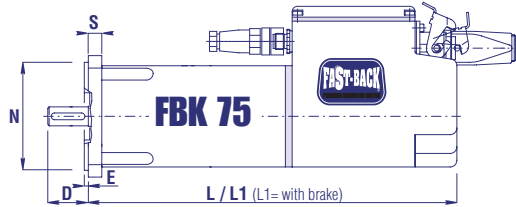


REFERENCES	L	L1	Bj6	D	Vh9	W	U	Nj6	M	F	J	F'	E	S	R	T	WEIGHT°	WEIGHT° with BRAKE		
SERIES - Mo (Nm)	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg		
FBK 75 XS 1.1	230	280	11	23	4 x 18	12.5	M4x10	60	90	5.5	75	M5x8	2.5	10	75	100	2.85	3.45		
FBK 75 S 1.6	245	295															3.3	3.9		
FBK 75 M 2.7	275	325															4.2	4.8		
FBK 75 L 3.8	305	355	14	30	5 x 25	16	M6x16	95	115	9	/	/	3	12	100	135	5.0	5.6		
FBK 100 S 3.2	303	359	5.8	6.5																
FBK 100 M 5.2	338	394	7	7.7																
FBK 100 L 7.5	373	429																	8.2	8.9

## CONNECTION DATA

### POWER SUPPLY CONNECTOR X1

- 1 = L1 (Power supply)
- 2 = L2 (Power supply)
- 3 = +24 Vdc (back-up)
- 4 = L3 (Power supply)\*
- 5 = 0 Vdc (back-up)
- ⊕ = PE



### CAN BUS IN/OUT X2 - X3

- 1 = ⊕ PE / Shield
- 2 = CAN L
- 3 = PGND (OV CAN)
- 4 = CAN H



### RS 485 IN/OUT

- 1 = ⊕ PE / Shield
- 2 = 485 B
- 3 = PGND (OV 485)
- 4 = 485 A

optional  
M12/4p connector

### SIGNALS IN/OUT X4

- 1 = DGT-IN 1
- 2 = DGT-IN 2
- 3 = DGT-OUT 1
- 4 = DGT-IN/OUT RTN
- 5 = ⊕ PE / Shield



M12/5p connector

### RS232 X5


- 1 = TXD
- 2 = RXD
- 3 = PGND
- 4 = AN-OUT 1
- 5 = AGND



M12/5p connector

\*: for three phase power supply only

## CHARACTERISTIC CURVES TORQUE VS. SPEED

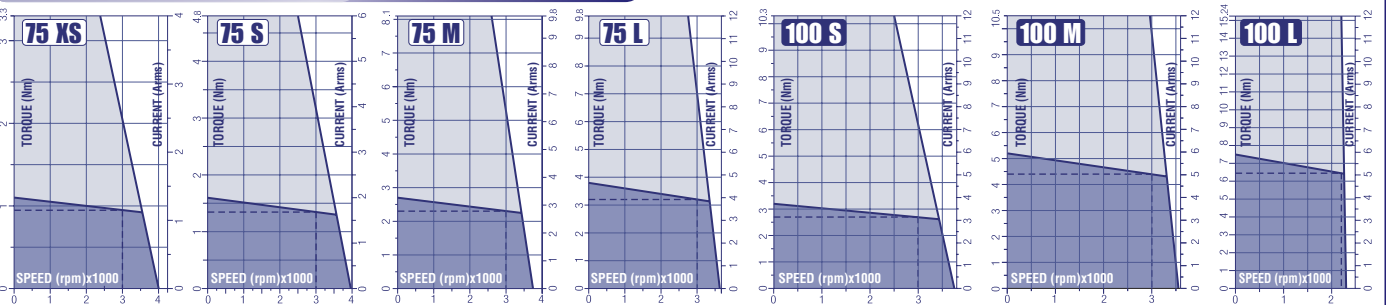

## ORDERING CODE

Example:

**FBK 75 M 30 / 220T 000D00X 0 T15 F0 FR 1 XX 000XX 00000 / 00000**

### HARDWARE

### SOFTWARE

NAME: Line of Brushless Powered Motors

SERIES: 75, 100

SIZE: XS, S, M, L

NOMINAL SPEED Ex: 30=3000 Rpm

POWER SUPPLY MODE:  
220T= 230 Vac three ph. (std)  
220M= 230 Vac single ph. (opt)

HOLDING BRAKE:  
0=without brake (std)  
1=with brake (opt)

CONNECTION ORIENTATION:  
FR=forward/rear exits (std for FBK 75)  
TT=top/top exits (std for FBK 100)

AXOR internal use:  
XX= std  
+R= reducer presence(opt)

### FLANGE & SHAFT

MOUNTING FLANGE:  
000= standard (see above)  
001-499= IEC metric dimension  
501-999= Axor's internal code

MOUNTING HOLES:  
D= B5 flange with thru holes (standard)  
C= B14 flange with threaded holes (optional)

**000D00X** = standard for all motors (see above)

SHAFT KEY:  
x= with key (standard)  
w= without key (optional)

SHAFT DIAMETER:  
00= standard (see above)  
01 - 49= IEC metric diameter  
51 - 99= Axor's internal code

### PROTECTION CLASS:

- 1= IP54 (std)
- 2= IP65 (opt)
- 3= IP65S with shaft oil seal (opt)

### ELECTRICAL CONNECTIONS:

- F0 = Flying Connectors, fixed part only (std)
- 1x(5p+⊕PE) bayonet power connector)
- 2x(M12/ 4p signals screw connector)
- 2x(M12/ 5p signals screw connector)

### ADDITIONAL FEATURES:

**0 0 0 X X**

CBMD: CAN BUS+ MULTIDROP interf.  
1= Present (std)  
0= Not present (opt)

Not in use  
Not in use

FEEDBACK:  
T15 = 01H3506- 2048 p/rev (std for FBK 75)  
T05 = 01H4808- 2048 p/rev (std for FBK 100)

RS485 Interface  
1= Present (opt)  
0= Not present (std)

SEF: Safety Enable Function  
1= Present (opt)  
0= Not Present (std)

SPECIAL FLANGES & SHAFTS OPTIONAL	Bj6	D	Vh9	W	U	Nj6	M	F	F'	E	S	R	T
100D14X (FBK 75 all sizes)	14	30	5x25	16	M4x10	80	100	6.6	—	—	3	10	115
130D14X (FBK 75 all sizes)	14	30	5x25	16	M4x10	110	130	9	—	—	3.5	10	115
100C19X (FBK 100 all sizes)	19	40	6x32	21.5	M6x16	80	—	—	100	M6x10	3	12	95
115D24X (FBK 100 all sizes)	24	50	8x40	27	M8x19	95	115	9	—	—	3	12	100

boby servo-electronic ag Zentralstr. 6 6030 Ebikon  
Tel 041 440 77 22 Fax 041 440 69 43  
www.boby.ch info@boby.ch



Specifications subject to change without notice. This document has been carefully checked. However, Axor does not assume liability for errors or inaccuracies. © COPYRIGHT 2007 AXOR INDUSTRIES. All rights reserved. Printed in Italy. 01/07

Part number D.S./03.05/FBK/04