


4 equidistant Holes
M5 x 10.0 Min. Deep
on 40.0 PCD

POWER LEAD CONFIGURATION

Size :- 20 AWG

Red :- + ve

Black :- - ve

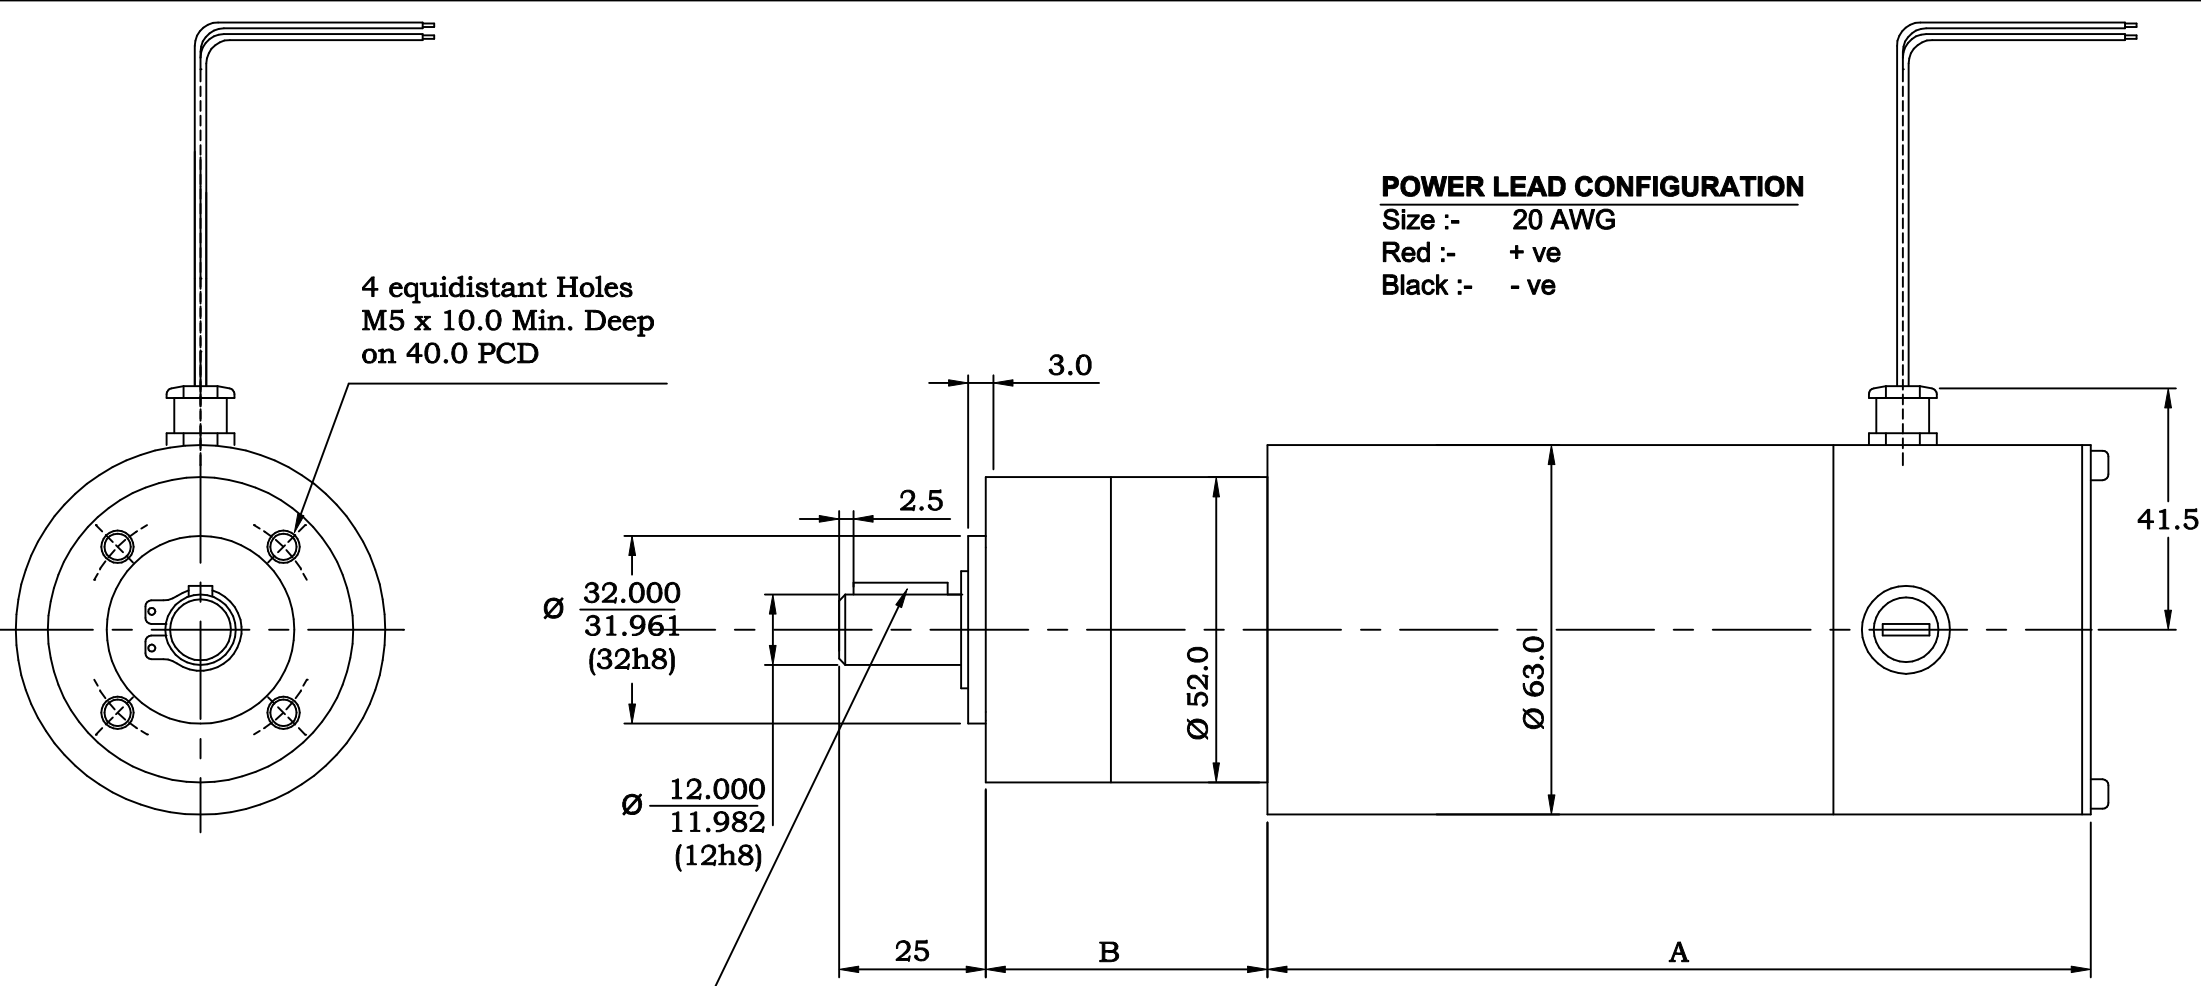

Key & keyway A 4x4x16
Din 6885 Page 1

	"A"	"B"
C4-161-AA000-000	113.0	48
C4-162-AA000-000	140.5	48

Notes:

1. Clockwise rotation as viewed from output shaft with positive voltage applied to red lead with respect to black lead.
2. All dimensions in mm.
3. Gearbox :- 1 stage, planetary , i = 7:1 (rounded)

				Tolerances. X.X = ± 0.3 mm X.XX = ± 0.1 mm Ang. Dim. = ± 1°		Scale : 1.5 : 1				Weight :			
				Date		Name		Material : Remove all burrs and sharp corners					
				Drawn		Date		Gear Motor Outline					
				App'd		Name		C4-16x-AA000-000					
Issue				ECO. No.		Date		Name		App'd		Norm	
bobby servo-electronic ag								C4-16x-AA000-000				Sheet 1 of 1	